

പതിമൂന്നാം കേരള നിയമസഭ

പതിനാലാം സമ്മേളനം

നക്ഷത്ര ചിഹ്നമിടാത്ത നിയമസഭാ ചോദ്യം നമ്പർ: 2335 08.07.2015 - ൽ മറുപടിക്ക്

തരുർ മണ്ഡലത്തിലെ പുതിയ കുടിവെള്ള പദ്ധതി

ചോദ്യം

മറുപടി

ശ്രീ.എ.കെ.ബാലൻ

പി ജെ. ജോസഫ്
(ജലവിഭവ വകുപ്പ് മന്ത്രി)

(എ) തരുർ മണ്ഡലത്തിലെ തരുർ, കാവശ്ശേരി, പുതുകോട് പഞ്ചായത്തുകൾക്ക് വേണ്ടിയുള്ള പുതിയ കുടിവെള്ള പദ്ധതിയുടെ പ്രോജക്ട് റിപ്പോർട്ട് തയ്യാറാക്കിയിട്ടുണ്ടോ; എങ്കിൽ ആയതിന്റെ വിശദാംശങ്ങൾ വ്യക്തമാക്കുമോ;


(എ) തരുർ മണ്ഡലത്തിലെ തരുർ, കാവശ്ശേരി, പുതുകോട് പഞ്ചായത്തുകൾക്ക് വേണ്ടിയുള്ള ശുദ്ധജല വിതരണ പദ്ധതിക്ക് 2970 ലക്ഷം രൂപയുടെ പ്രാഥമിക എഞ്ചിനീയറിംഗ് റിപ്പോർട്ട് തയ്യാറാക്കിയിരുന്നു. ഈ റിപ്പോർട്ട് സി.പി.ഡബ്ല്യു.ഡി.നിരക്ക് അനുസരിച്ച് പുതുക്കി തയ്യാറാക്കി വരുന്നു. പ്രാഥമിക എഞ്ചിനീയറിംഗ് റിപ്പോർട്ട് പ്രകാരമുള്ള ഘടകങ്ങളുടെ വിവരങ്ങൾ അനുബന്ധമായി ചേർക്കുന്നു.

(ബി) പദ്ധതി അംഗീകാരത്തിനായി എസ്.എൽ.എസ്.എസ്.സി. മൂമ്പാകെ സമർപ്പിച്ചിട്ടുണ്ടോ; പദ്ധതിക്ക് അംഗീകാരം ലഭിച്ചിട്ടുണ്ടോ; എത്ര രൂപയുടേതാണ് പദ്ധതി രൂപരേഖ;

(ബി) പദ്ധതി എസ്.എൽ.എസ്.എസ്.സി. മൂമ്പാകെ സമർപ്പിച്ചിട്ടില്ല. 2970 ലക്ഷം രൂപയുടെ പ്രാഥമിക എഞ്ചിനീയറിംഗ് റിപ്പോർട്ടാണ് തയ്യാറാക്കിയിട്ടുള്ളത്. സി.പി.ഡബ്ല്യു.ഡി. നിരക്ക് അനുസരിച്ച തുകയ്ക്ക് മാറ്റം വരുന്നതാണ്.

(സി) പദ്ധതിയുടെ ഡി.പി.ആർ. തയ്യാറാക്കി സമർപ്പിച്ചിട്ടുണ്ടോ; ഭരണാനുമതി നൽകുന്നതിന് നടപടി സ്വീകരിച്ചിട്ടുണ്ടോ; വിശദാംശങ്ങൾ ലഭ്യമാക്കുമോ?

(സി) പദ്ധതിയുടെ ഡി.പി.ആർ. തയ്യാറാകുന്ന മുറയ്ക്ക് എസ്.എൽ.എസ്.എസ്.സി.യിൽ വയ്ക്കുന്നതാണ്.


സെക്ഷൻ ഓഫീസർ

7/49

Not of M.L. work

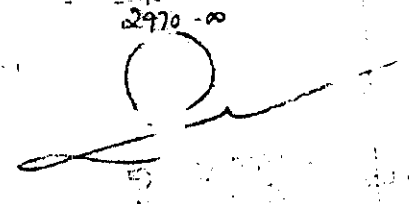
**WATER SUPPLY SCHEME TO NC - PC HABITATIONS
COMPREHENSIVE WATER SUPPLY SCHEME TO
THARUR. KAVASSERY AND PUDUCODE GRAMA PANCHAYATHS
IN PALAKKAD DISTRICT**

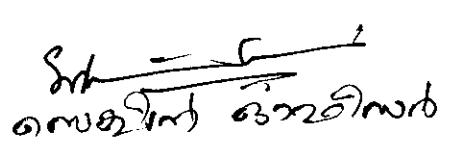
General Abstract

1. Construction of Intake well cum pump house at Oravaumchal, Thottinpalla near Pazhambalakode in Gayaathri/Mangalam river in Tharur Panchayath = 80.00 Lakhs
2. Supplying and erection of Raw water pump set (suitable Vertical Turbine motor pump set) of capacity 85 H.P 2 No's @ Rs 19500/H.P = 33.15 Lakhs
3. Supplying and Laying 400 mm DI K9 Raw water Pumping Main from intake well to the proposed Water Treatment Plant at Charkakalam. Ottuparapady 2500 meter @ Rs. 8000 /meter = 200.00 Lakhs
4. Construction of 10.00 MLD Water Treatment Plant with Sump at Charkakalam. Ottuparapady 10.00 MLD @ Rs. 50, 00,000 / MLD = 500.00 Lakhs
5. Supplying and erection of Clear water pump set (suitable Centrifugal motor pump set) of capacity 30 H.P to Kudamuruttukunnu in Tharur I Village 2 No's @ Rs 11500/H.P = 6.90 Lakhs
6. Supplying and erection of Clear water pump set (suitable Centrifugal motor pump set) of capacity 20 H.P to Arinjichira in Tharur II Village 2 No's @ Rs 11500/H.P = 4.60 Lakhs
7. Supplying and erection of Clear water pump set (suitable Centrifugal motor pump set) of capacity 90 H.P to Aalkunnu in Kavassery I and II Village 2 No @ Rs 11500/H.P = 20.70 Lakhs
8. Supplying and erection of Clear water pump set (suitable Centrifugal motor pump set) of capacity 35 H.P to Pudukode Village 2 No's @ Rs. 11500/H.P = 8.05 Lakhs

14/17
 58.2 Lakhs

- | | |
|--|------------------------------------|
| 9. Supplying and Laying Clear Water Pumping main from Water Treatment Plant to Kudamuruttykundu OHSR using 200 mm DI K9 Pipes 5360 meter @ Rs. 3000 / meter | = 160.80 Lakhs |
| 10. Supplying and Laying Clear Water Pumping main from Water Treatment Plant to Arikkinchira OHSR using 150 mm DI K9 Pipes 8075 meter @ Rs. 2000 / meter | = 161.50 Lakhs |
| 11. Supplying and Laying Clear Water Pumping main from Water Treatment Plant to Ammalkundu OHSR using 250 mm DI K9 Pipes 13250 meter @ Rs. 5000 / meter | = 662.50 Lakhs |
| 12. Supplying and Laying Clear Water Pumping main from Water Treatment Plant to Thachanady GLSR/ OHSR using 250 mm DI K9 Pipes 8400 meter @ Rs. 5000 / meter | = 420.00 Lakhs |
| 13. Construction of 7.60 Lakhs capacity Over Head Service Reservoir at Kudamurutty kundu in Tharur I Village in Tharur Grama Panchayath | = 152.00 Lakhs |
| 14. Construction of 12.20 Lakhs capacity Over Head Service Reservoir at Ammalkundu in Kavassery I and II Village in Kavassery Grama Panchayath | = 244.00 Lakhs |
| 15. Construction of 4.70 Lakhs capacity Over Head Service Reservoir at Thachanady in Puducide Village in Puducode Grama Panchayath | = 98.00 Lakhs |
| 16. Supplying and Laying Distribution to NC -PC Habitations 160 mm PVC to 75 mm PVC 20000 metre @ Rs. 800 / metre | = 160.00 Lakhs |
| 17. Supply erection of transformer and Extension of 11 KV Power line | = 20.00 Lakhs |
| 18. Road Restoration Charges and Other Unforeseen items | = 22.80 Lakhs |
| Grand Total | = 2970.00 2970.00 Lakhs |
| (Rs. 2970.00 Lakhs and Seventy Lakhs only) | |


 5/11/2017


 അസിസ്റ്റന്റ് സെക്ഷനറി